

### Features

- 4-Ch. AO slave module
- Max. 100Mbps transfer rate
- Rotary switch for address setting
- Easy installation with RJ45 phone jack and LED diagnostic
- Pluggable terminal block with spring plug connectors
- DIN rail mounting (L-122 x W-65 x H-104 mm)


### Specifications

Serial interface	Fast Ethernet, Full-Duplex
Distributed Clock	1ms
Cable type	CAT5 UTP / STP Ethernet cable
Surge protection	10KV
Transmission speed	100Mbps
I/O isolation voltage	3750Vrms
Number of outputs	4-channel AO
Effective resolution	16bits
Accuracy	±0.1% (F); ±0.05% (FH)
Output range	±10V
Operation mode	Ramp and Noise, Single Value, Single Coupled Value, Pattern
Power input	24VDC±10%
Power consumption	3W typical
Working temperature	0 to 60°C

### Ordering Information

207-A202F	4-Ch. Analog Output (AO) w. ±10V
207-A202FH	4-Ch. Analog Output (AO) w. ±5V
SCB-1BB-06A/10A /20A/30A/50A/A0A	CAT5 LAN cable, 0.6M/1M/2M/3M/5M/10M

### Dimensions and Drawing

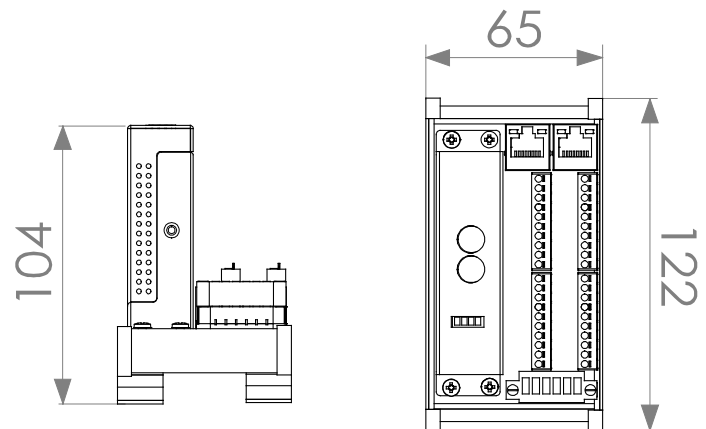

01 EtherCAT Digital Slave

02 EtherCAT Analog Slave

03 EtherCAT Motion Slave

04 EtherCAT Microstep Driver

05 EtherCAT Start-KIT